



KONICA MINOLTA

bizhub C287

- ✓ Colour A3 multifunctional
- ✓ Up to 28 pages per minute

Functionality



Printing

- Colour
- PCL/PS
- Local/Network
- USB
- Mobile



Scanning

- Colour
- Black & white
- Scan-to-eMail
- Scan-to-Me
- Scan-to-SMB
- Scan-to-Home
- Scan-to-FTP
- Scan-to-Box
- Scan-to-USB
- Scan-to-WebDAV
- Scan-to-DPWS
- TWAIN Network



Copying

- Black & white
- Colour



Faxing

- G3 Fax
- PC-Fax
- i-Fax
- IP-Fax



Box

- Reprint
- Distribution
- Sharing
- Box-to-Box
- Box-to-USB




Giving Shape to Ideas

Technology

Emperon™ – print controller	Easily compatible with different users and IT environments through Konica Minolta's unified print technology	☐
Simitri® HD – polymerised toner	Delivers high print quality and yet ensures reduced print spending as well as lower environmental impact	☐
OpenAPI – solution platform	Server-based applications provide efficient workflows for the entire MFP fleet	☐
i-Option – special feature	Offers extended scope and advanced MFP functionality in line with individual requirements	☐
CSRC – remote service	Keeps productivity up with online monitoring of devices and consumables through the Konica Minolta service	☐
IWS – panel customisation	Improved user-device interaction and enhanced productivity through full MFP panel customisation	☐

Option diagram

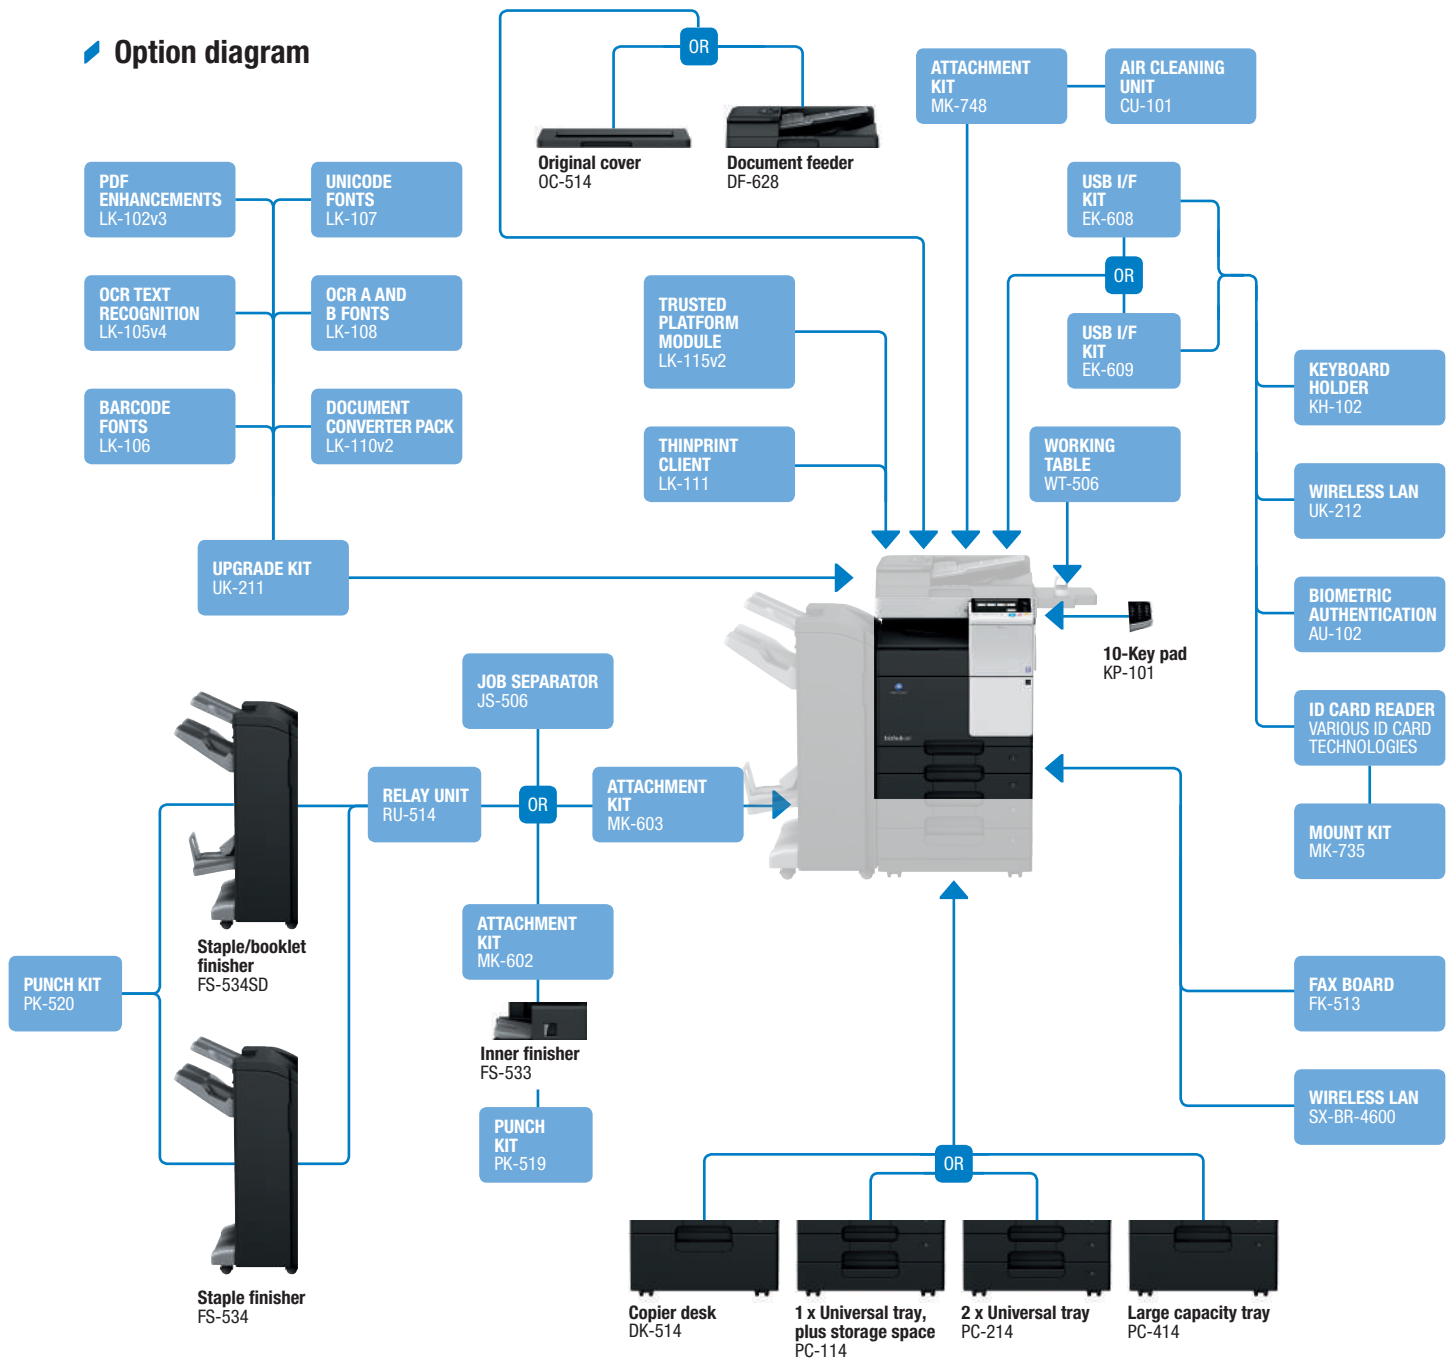

Finishing functionalities

- 
Corner stapling
- 
Two-point stapling
- 
Two-hole punching
- 
Four-hole punching
- 
Duplex
- 
Combined mixplex/mixmedia
- 
Half-fold
- 
Sheet insertion, report
- 
Letter-fold
- 
Booklet
- 
Offset sorting

Descriptions

bizhub C287	Communication centre with 28 ppm b/w and colour. Standard Emperon™ print controller with PCL 6 (PCL 5c + XL 3.0), PostScript 3, PDF 1.4, XPS and OOXML support. Paper capacity of 500 + 500 sheets and 100-sheet manual bypass. Media from A6 to A3 and 60 – 256 gsm. 2 GB memory, 250 GB hard disk and Gigabit Ethernet standard.	KP-101 10-Key pad	For use instead of touchscreen
DF-628 Document feeder	Reversing automatic document feeder, capacity 100 originals	WT-506 Working table	Authentication device placement
OC-514 Original cover	Cover instead of ADF	FK-513 Fax board	G3 fax, digital fax functionality
PC-114 1 x Universal tray	A5–A3, 500 sheets, 60–256 gsm	KH-102 Keyboard holder	To place USB keyboard
PC-214 2 x Universal tray	A5–A3, 2 x 500 sheets, 60–256 gsm	EK-608 USB I/F kit	USB keyboard connection
PC-414 Large capacity tray	A4, 2,500 sheets, 60–256 gsm	EK-609 USB I/F kit	USB keyboard connection, Bluetooth LE
DK-514 Copier desk	Provides storage space for print media and other materials	ID card reader	Various ID card technologies
MK-602 Attachment kit	For FS-533 installation	MK-735 Mount kit	Installation kit for ID card reader
MK-603 Attachment kit	For FS-533, FS-534/SD, JS-506 installation	AU-102	Finger vein scanner
FS-533 Inner finisher	50-sheet stapling, 500 sheets max. output	Biometric authentication	
PK-519 Punch kit for FS-533	2/4 hole punching, autoswitching	LK-102v3	PDF/A, PDF encryption, digital signature
FS-534 Staple finisher	50-sheet stapling, 3,300 sheets max. output	PDF enhancements	
FS-534SD Booklet finisher	50-sheets staple finisher, 20-sheets booklet finisher, 2,300 sheets max. output	LK-105v4	Searchable PDF and PPTX
RU-514 Relay unit for FS-534	For FS-534 installation	OCR text recognition	
PK-520 Punch kit for FS-534/SD	2/4 hole punching, autoswitching	LK-106 Barcode fonts	Supports native barcode printing
JS-506 Job separator	Separation for fax output etc.	LK-107 Unicode fonts	Supports native Unicode printing
		LK-108 OCR A and B fonts	Supports native OCR A and B font printing
		LK-110v2 Document converter pack	Generates various file formats incl. DOCX, XLSX and PDF/A
		LK-111 ThinPrint® Client	Print data compression for reduced network impact
		LK-115v2 TPM activation	Trusted Platform Module for protection of data encryption and decryption
		UK-211 Upgrade kit	2 GB memory extension for upgrades
		UK-212 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode
		SX-BR-4600 Wireless LAN	Wireless LAN to network connector
		MK-748 Attachment kit	Installation kit for CU-101
		CU-101 Air cleaning unit	Improving indoor air quality by reduced emissions

Technical specifications

SYSTEM SPECIFICATIONS

System memory	2,048 MB (standard)
System hard disk	250 GB (standard)
Interface	10-Base-T/100-Base-T/1,000-Base-T Ethernet; USB 2.0
Network protocols	TCP/IP (FTP; SMB; SMTP; WebDAV) (IPv4/IPv6)
Frame types	Ethernet 802.2; Ethernet 802.3; Ethernet II; Ethernet SNAP
Automatic document feeder	Up to 100 originals; A6–A3; 35–128 gsm RADF optional available
Printable paper size	A5–A3; A6S; banner paper; Thick Paper X/Y size input range: Width: 90–297 mm; Length: 139.7–431.8 mm
Printable paper weight	60–256 gsm
Paper input capacity	Standard: 1,100 sheets Max.: 3,600 sheets
Tray 1	500 sheets; A5–A4; 60–256 gsm
Tray 2	500 sheets; A5–A3; 60–256 gsm
Tray 3 (optional)	500 sheets; A5–A3; 60–256 gsm
Tray 4 (optional)	2 x 500 sheets; A5–A3; 60–256 gsm
Large capacity tray (optional)	2,500 sheets; A4; 60–256 gsm
Manual bypass	100 sheets; A6–A3; 60-256gsm
Automatic duplexing	A5–A3; 60–256 gsm
Finishing modes (optional)	Offset; group; sort; staple; punch; centre-fold; letter fold; booklet
Output capacity (with finisher)	Max.: 3,300 sheets
Output capacity (without finisher)	Max.: 250 sheets
Stapling	Max.: 50 sheets or 48 sheets + 2 cover sheets (up to 209 gsm)
Stapling output capacity	Max.: 1,000 sheets
Letter fold	Up to 3 sheets
Letter fold capacity	Max.: 30 sheets (tray); unlimited
Booklet	Max.: 20 sheets or 19 sheets + 1 cover sheet (up to 209 gsm)
Booklet output capacity	Max.: 100 sheets
Copy/print volume (monthly)	Rec.: 13,000 pages Max.: 28,000 pages
Toner lifetime	Black 24,000 pages; CMY 21,000 pages
Imaging unit lifetime	Black 105,000 pages/600,000 pages (Drum/Developer) CMY 90,000 pages (Imaging Unit)
Power consumption	220–240 V / 50/60 Hz; Less than 1.6 kW (system)
System dimensions (W x D x H)	585 x 660 x 735 mm (main body)
System weight	Approx. 72 kg (without options/toner)

COPIER SPECIFICATIONS

Copying process	Electrostatic laser copy; indirect
Toner system	Simitri® HD polymerised toner
Copy/print speed A4	Up to 28 ppm
Copy/print speed A3	Up to 14 ppm
Autoduplex speed A4	Up to 25 ppm
1st copy out time (mono/colour)	6.8 sec/8.4 sec
Warm-up time	Approx. 20 sec. ²
Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1 – 9,999
Original format	A5–A3
Magnification	25–400% in 0.1% steps; auto-zooming
Copy functions	Chapter; cover and page insertion; proof copy; adjustment test print; job setting memory; poster mode; image repeat; overlay (optional, with UK-211); stamping; copy protection

¹ If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed

² Warm-up time may vary depending on the operating environment and usage

PRINTER SPECIFICATIONS

Print resolution	1,800 (equivalent) x 600 dpi
Page description language	PCL 6 (PCL 5c + XL 3.0); PostScript 3 (CPSI 3016); XPS
Operating systems	Windows VISTA (32/64) Windows 7 (32/64) Windows 8 (32/64) Windows 8.1 (32/64) Windows 10 (32/64) Windows Server 2008/2008 R2 (32/64) Windows Server 2012/2012 R2 (64) Macintosh OS X 10.x Linux; Citrix
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Print functions	Direct print of PCL; PS; TIFF; XPS; PDF (v1.4); encrypted PDF files and OOXML (DOCX; XLSX; PPTX); mixmedia and mixplex; "Easy Set" job programming; overlay; watermark; copy protection; carbon copy print
Mobile Printing	AirPrint (iOS); Mopria (Android); Google Cloud Print (optional); WiFi Direct (optional); Konica Minolta Print Service (Android); PageScope Mobile (iOS & Android); NFC Authentication and Pairing (Android)

SCANNER SPECIFICATIONS

Scan speed (with optional document feeder) (mono/colour)	Up to 45 ipm
Scan resolution	Max.: 600 x 600 dpi
Scan modes	Scan-to-eMail (Scan-to-Me) Scan-to-SMB (Scan-to-Home) Scan-to-FTP Scan-to-Box Scan-to-USB Scan-to-WebDAV Scan-to-DPWS Network TWAIN scan
File formats	TIFF; PDF; Compact PDF; JPEG; XPS; Compact XPS; DOCX; XLSX; searchable PDF; PDF/A; linearized PDF
Scan destinations	2,100 (single + group); LDAP support
Scan functions	Annotation (text/time/date) for PDF; up to 400 job programs; Realtime scan preview

FAX SPECIFICATIONS

Fax standard	G3
Fax transmission	Analogue i-Fax Colour i-Fax IP-Fax
Fax resolution	Max.: 600 x 600 dpi (ultra-fine)
Fax compression	MH; MR; MMR; JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	2,100 (single + group)
Fax functions	Polling; time shift; PC-Fax; receipt to confidential box; Receipt to e-mail/FTP/SMB; up to 400 job programs

USER BOX SPECIFICATIONS

Max. storable documents	Up to 3,000 documents or 10,000 pages
Type of user boxes	Public Personal (with password or authentication) Group (with authentication)
Type of system boxes	Secure print Encrypted PDF print Fax receipt Fax polling
User box functionality	Reprint; combination Download Sending (e-mail/FTP/SMB and fax) Copy box to box

SYSTEM FEATURES

Security	ISO 15408/IEEE 2600.2 compliant (in evaluation); IP filtering and port blocking; SSL2; SSL3 and TLS1.0 network communication; IPsec support; IEEE 802.1x support; user authentication; Authentication log; secure print; Hard disk overwrite (8 standard types); Hard disk data encryption (AES 256); Memory data auto deletion; Confidential fax receipt; Print user data encryption; copy protection
Accounting	Up to 1,000 user accounts; Active Directory support (user name + password + e-mail + smb folder) User function access definition Biometric authentication (finger vein scanner) optional ID card authentication (ID card reader) optional
Software	PageScope Net Care Device Manager PageScope Data Administrator PageScope Box Operator PageScope Direct Print Print Status Notifier Driver Packaging Utility Log Management Utility

- All specifications refer to A4-size paper of 80 gsm quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

